


## Cable strip for reopening

Product group A01.02

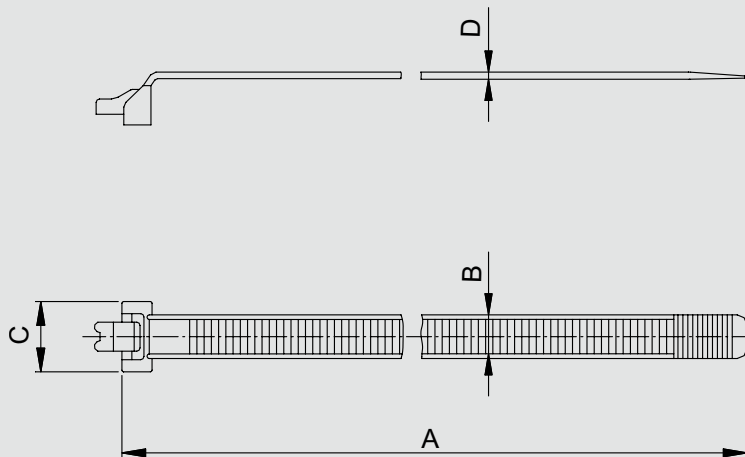

### Features

- For quick and reliable bundling of cables, cable looms, hoses, etc.
- Does not become brittle or porous at low temperatures.
- Resistant to oils, grease, fuels and many other organic materials.
- Absolutely secure lock.
- Long service life.
- Operating temperature: -50° to +100° C.
- Minimum tie resistance: 265 N / 27 kp.

IMS Part No.	A	B	C	D	Loom Ø	Material	Colour
12009520	97,00	4,00	8,50	1,20	6,00 - 20,00	PA 66	BR
1202009B	100,00	7,00	11,00	1,50	8,00 - 20,00	PA 12	S
12000820	118,00	2,80	6,00	0,70	23,00 - 25,00	PA 66	S
12009500	138,00	2,80	6,00	0,70	26,00 - 28,00	PA 12	S
1202009C	140,00	9,00	14,00	1,50	10,00 - 33,00	PA 12	S
12009510	155,00	2,80	6,00	0,70	35,00 - 37,00	PA 6	S
1202009D	250,00	9,00	14,00	1,50	10,00 - 70,00	PA 12	S

*The part does not always correspond in the detail of the drawing. All measurements in mm.*